elock Sensor Series



EL-800P

Features

EL-800P white color miniature door contact is meant for easy installation.

Suitable for most security system.

- Ruthenium Over Gold Reeds
- UL approved PVC Lead Out wire


Specification

- Maximum Contact Rating :- 100VDC 0.5A 10W
- Wide Gap :
- 1"

Wide Gap Closed Loop

- Dimension : (33 L x 15 W x 8 D) mm
- Safety Approval:- CE
- ISO 9000 certified Manufacturer

User Guide: Product Dimension

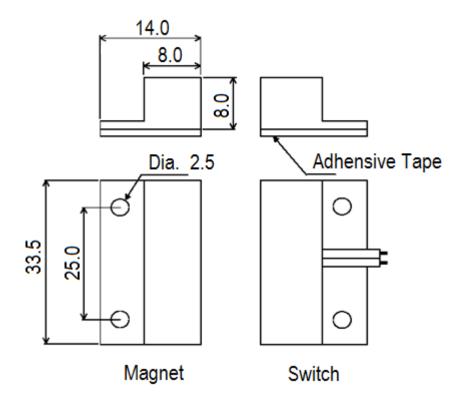




Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +603-8051 5788 FAX +603-8051 4919


WEB www.elock2u.net EMAIL enquiry@elock2u.net

Installation Instruction:

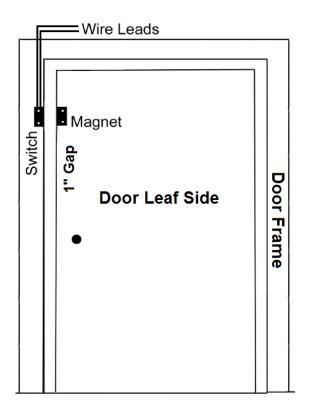

- Place the switch (with wire) on door frame, mark the mounting position and fix the screw in door frame to mount the switch
- Place the magnet on door leaf, mark the mounting position and fix the screw in door leaf to mount the magnet
- Make sure maximum gap is 1 inch between switch and magnet
- 4. Connect the wire leads from reed switch to panel
- 5. Designed for use with steel, wood and other door and window materials

Surface Mount





Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

WEB www.elock2u.net EMAIL enquiry@elock2u.net